

home 40 clcf

click

plank: 1210 × 176,6 mm – box: 8 planks (=1,709 m²) – Pallet: 80 boxes (=136,76 m²)

product specifications.

Total thickness	EN ISO 24346
Thickness of the wear layer	EN ISO 24340
Total weight	EN ISO 23997
Usage classification	EN ISO 10582

click comfort 40

plank

4 mm + 1 mm


0,4

7,9 kg/m²

23/32

test results.

Underfloor heating	EN ISO 12524	suitable – max. 27°C (80°F)/ electrical floor heating systems: max 60 W/m ²
Castor chair	EN ISO 4918	pass
Fire resistance	EN ISO 13501-1	Bfl-s1
Light fastness	EN ISO 105-B02	> 7
Thermal resistance	EN 8302	0,035 m ² K/W
Chemical resistance	EN ISO 26987	OK
Residual indentation	EN ISO 24343-1	<0,1mm
Slip resistance	DIN 51130	R10
	EN ISO 13893	class DS
Sound reduction: impact sound	EN ISO 717-2	20 dB
Reflected walking sound	EPLF draft 021029-3-2004	33 SONE (57% sound reduction)
Dimensional stability	EN ISO 23999	< 0,15 %
Residential warranty		20 y
Commercial warranty		5 y
Formaldehyde	EN ISO 717-1	E1
Lock strength	EN ISO 10582	> 4 kN/m



spirit.

home 40 clcf

Underlay


Material		IXPE
Thickness		1 mm
Compressive strength	EN 826	117 kPa
Punctual conformability	CEN TS 16354: 12-2013	0.52mm
Water absorption	EN 12087	0.6%



home 40 clcf

spirit.

spirit.
HOME 40 click comfort

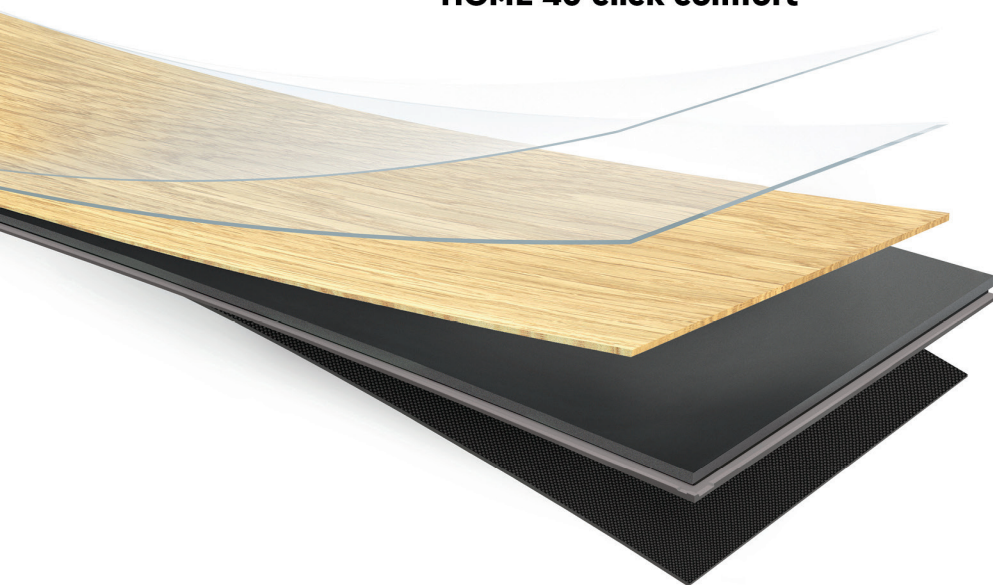

- 1 Protective PU lacquer
- 2 Wear layer 0,4 mm
- 3 Decorative printfilm
- 4 Rigid board
- 5 Integrated underfloor (1 mm)

Total thickness: 4+1 mm (planks)